

AD-A114 126

TEXAS UNIV AT AUSTIN APPLIED RESEARCH LABS
AMBIENT NOISE IN THE WESTERN GULF OF MEXICO. (U)
MAR 82 J A SHOOTER, T E DEMARY, R A KOCH
ARL-TR-82-15


F/G 20/1

N00014-82-C-0049

UNCLASSIFIED

NL

1 OF 1
AD-A
14126



END

DATE

FILED

05-82

DTIC

2

ARL-TR-82-15 ✓

Copy No. 62

AMBIENT NOISE IN THE WESTERN GULF OF MEXICO

Jack A. Shooter
Thomas E. DeMary
Robert A. Koch

APPLIED RESEARCH LABORATORIES
THE UNIVERSITY OF TEXAS AT AUSTIN
POST OFFICE BOX 8028, AUSTIN, TEXAS 78712-8028

11 March 1982

Technical Report

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

Prepared for:

**NAVAL OCEAN RESEARCH AND
DEVELOPMENT ACTIVITY
DEPARTMENT OF THE NAVY
NSTL STATION, MS 39529**



DTIC
ELECTE
MAY 04 1982
S D
E

DTIC FILE COPY

AD A114126

82 05 04 048

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
	AD A114126	
4. TITLE (and Subtitle)	5. TYPE OF REPORT & PERIOD COVERED	
AMBIENT NOISE IN THE WESTERN GULF OF MEXICO	technical report	
7. AUTHOR(s)	6. PERFORMING ORG. REPORT NUMBER	
Jack A. Shooter, Thomas E. DeMary, and Robert A. Koch	ARL-TR-82-15	
9. PERFORMING ORGANIZATION NAME AND ADDRESS	8. CONTRACT OR GRANT NUMBER(s)	
Applied Research Laboratories The University of Texas at Austin Austin, Texas 78712-8029	N00014-82-C-0049	
11. CONTROLLING OFFICE NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS	
Naval Ocean Research and Development Activity NSTL Station, MS 39529		
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	12. REPORT DATE	
	11 March 1982	
	13. NUMBER OF PAGES	
	30	
	15. SECURITY CLASS. (of this report)	
	UNCLASSIFIED	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report)		
Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
ambient noise hydrophones		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)		
<p>A brief 12 h segment of ambient noise from the Western Gulf of Mexico for a clear, calm period has been analyzed. The receiver depths were 170 m, 370 m, and 766 m; the bottom was at 3280 m. It was found that the ambient noise was dominated most of the 12 h by seismic exploration. To avoid this noise, quiet periods between seismic domination were used; the median noise levels at 50 Hz were found to be around 75-77 dB//1 μPa/$\sqrt{\text{Hz}}$ with the slightly higher levels at the SOFAR channel axis. Overall median levels were _</p>		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. 77-80 dB//1 μ Pa/ $\sqrt{\text{Hz}}$. These levels are lower than the 85 dB levels for the Atlantic near Bermuda.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

	<u>Page</u>
LIST OF FIGURES	v
I. INTRODUCTION	1
II. TIME SERIES	7
III. PERCENTILE SPECTRA	9
IV. MOORED SOURCE	13
V. ANALYSIS AND SUMMARY	15
A. Ambient Noise Relative to Number of Noise Sources	15
B. Noise Depth Dependence	17
APPENDIX - DATA PROCESSING PARAMETERS	19
REFERENCES	23

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	



LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1	Gulf of Mexico	2
2	Sound Speed Profile for Engineering Test	3
3	Broadband Detected Time Series for the Three Receivers Showing Seismic Exploration Signal Arrivals	4
4	Selected 1/10 Octave Band Time Series for Three Receivers	8
5	Percentile Spectral Levels for the Total 12 Hour Analysis Period Based on 1/10 Octave Band Data	10
6	Percentile Spectral Levels During a Period of Intense Seismic Exploration	11
7	Percentile Spectral Levels During a Relatively Quiet Time	12
8	Received Levels from the Moored Source for Three Hydrophone Depths as a Function of Time	14
9	Radar Contacts for the Western Gulf	16

I. INTRODUCTION

A 12 h segment of ambient noise has been analyzed at three shallow depths in the Western Gulf of Mexico during a calm and a clear period, 19-21 May 1979. The data were recorded using a programmable acoustic recorder (PAR)¹ with hydrophones at 170 m, 370 m, and 766 m. The bottom depth was 3280 m. The PAR location is shown in the bathymetry map (Fig. 1) at 25°46'N and 94°30.67'W, and the hydrophone depths relative to the sound velocity profile are shown in Fig. 2.

The ambient noise in the Gulf of Mexico is dominated by shipping noise and seismic exploration. Planning Systems, Inc., reported² 100-150 contacts of the noise sources in each 1° square along the Texas-Louisiana coast, including oil rigs and support boats. This high density was reported entirely within the 200 m depth contour. The "*" symbols on the map in Fig. 1 mark the location of seismic vessels³ for 7 June 1979, which was two weeks after the data were recorded. If it is assumed the seismic crews operate fairly constantly and do not stray outside their leases, these locations should be representative of exploration in the Gulf in May 1979.

In spite of the heavy density of ships and an active petroleum industry, the median noise levels were found to be lower than the noise levels around Bermuda,⁴ and approximately the same as some of the critical depth median noise levels for the Northeastern and Western Pacific.^{5,6} The median level between 20 and 50 Hz was 80 dB//1 μ Pz/ $\sqrt{\text{Hz}}$. Seismic exploration could be audibly detected virtually all of the time, and faded in and out in intensity. One of the high level exploration periods is shown in Fig. 3, which shows the broadband detected level from a dominating source pulsing with a period of 8.4 sec on all three receivers. The energy is nearly coincident at all receivers; the

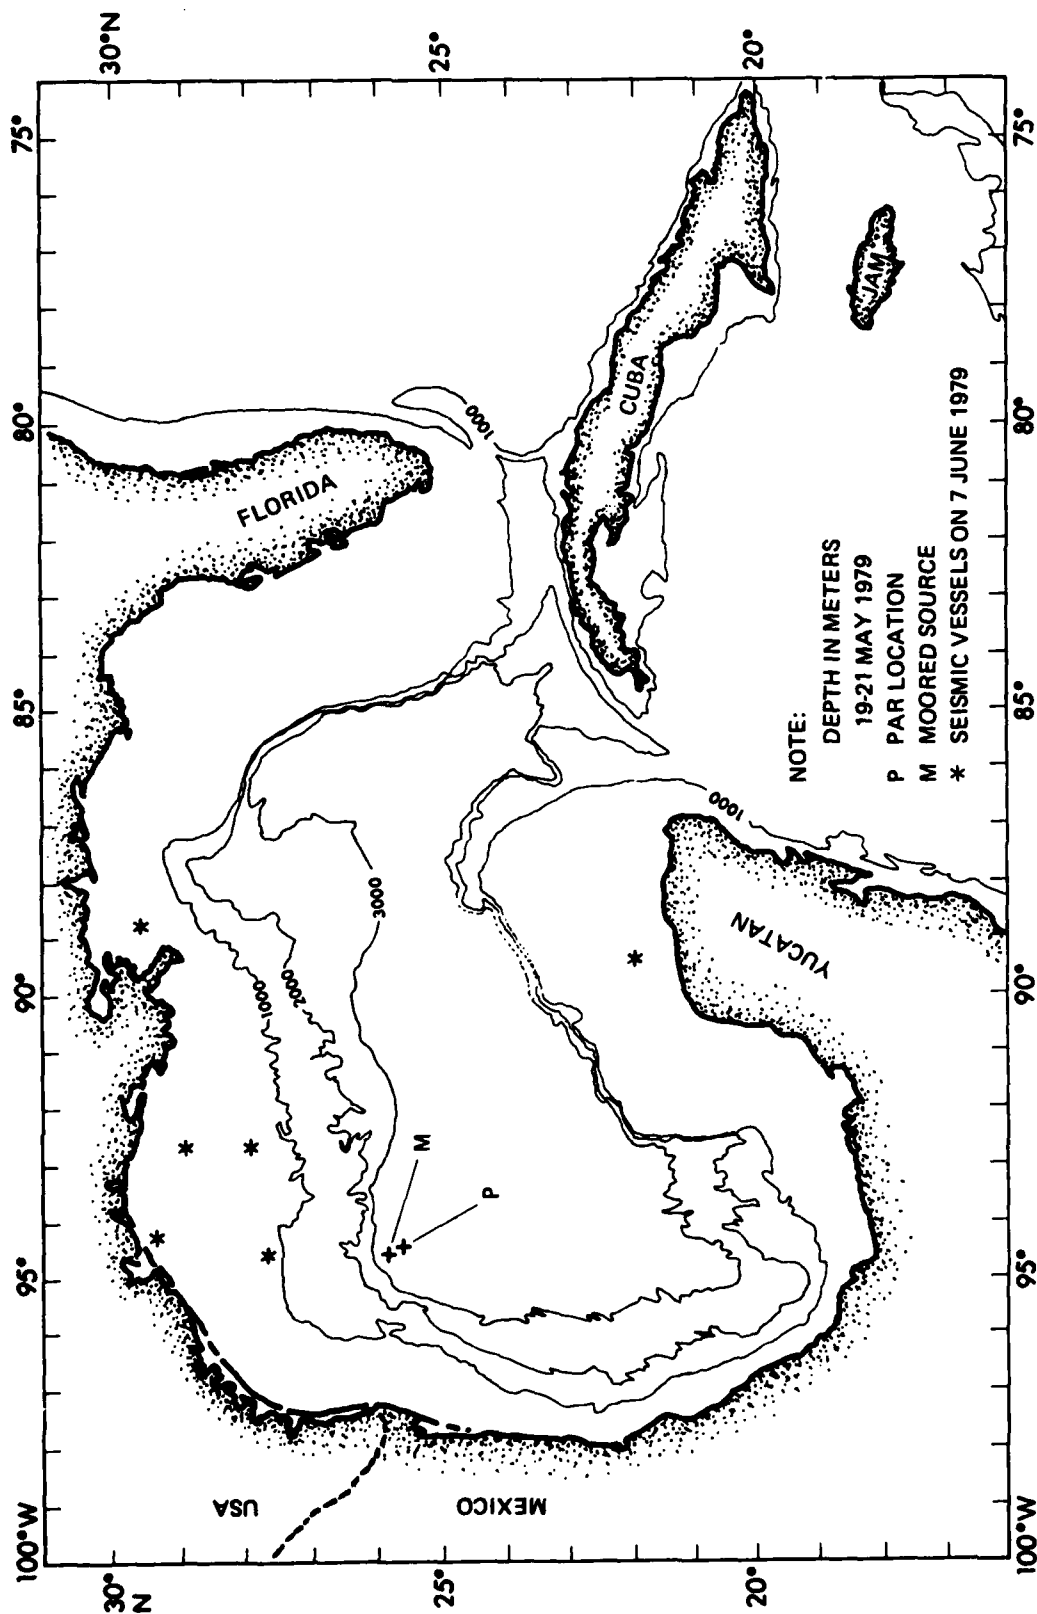


FIGURE 1
 GULF OF MEXICO

ARL:UT
 AS-81-883
 MWH - GA
 7-28-81
 REV 3-16-82

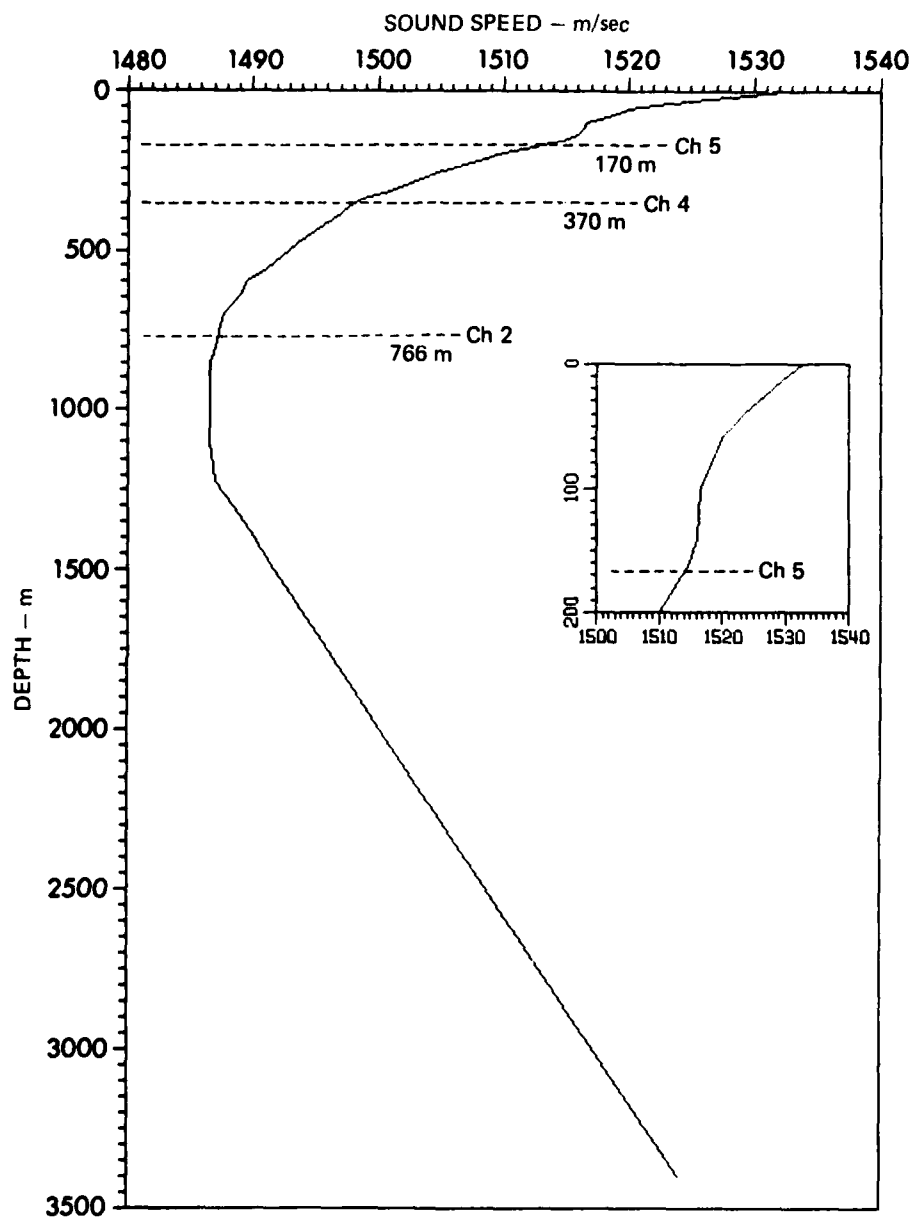


FIGURE 2
SOUND SPEED PROFILE FOR ENGINEERING TEST

ARL:UT
AS-81-1109
MWH - GA
8 - 25 - 81
REV 3-16-82

DETECTED LEVELS - RELATIVE SCALE

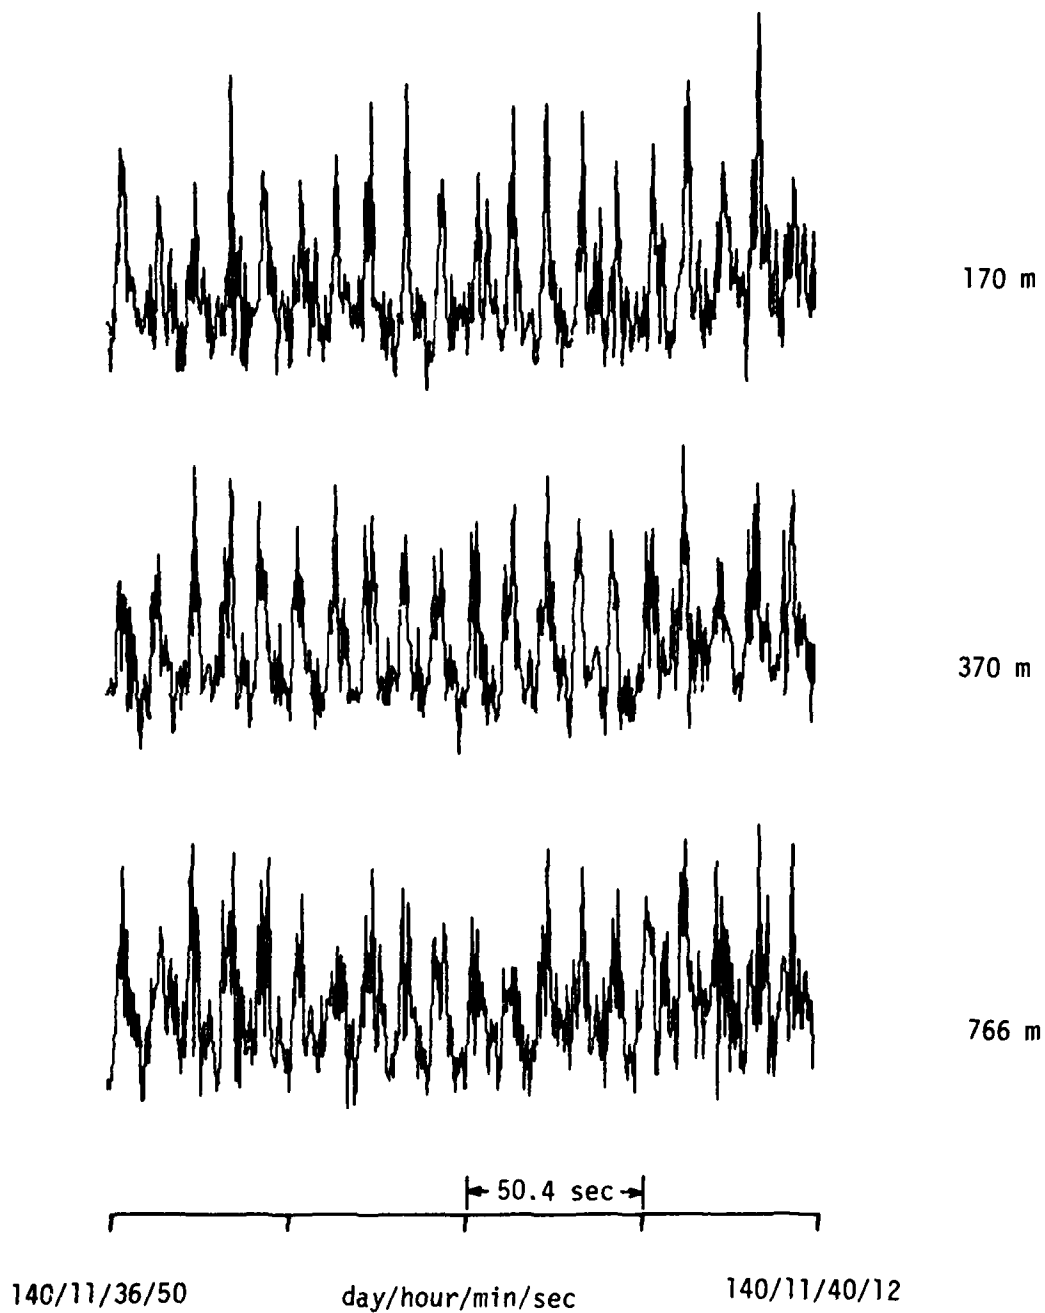


FIGURE 3
BROADBAND DETECTED TIME SERIES FOR THE THREE RECEIVERS SHOWING SEISMIC
EXPLORATION SIGNAL ARRIVALS

energy arrives slightly earlier on the two deeper receivers. A slight depth dependence of the noise field was noted; the data from the SOFAR axis showed 2 dB higher levels in the region of 50 Hz for the percentile levels of 10-50%.

Section II presents an overview of the 12 h time period in the form of 1/10 octave band time series. This is followed by percentile spectral levels in Section III. The moored source and data processing parameters are discussed in Section IV and the Appendix. The analysis in Section V summarizes the results and briefly discusses the mechanisms of acoustic propagation from shallow to deep water.

II. TIME SERIES

An overview of the 12 h analysis period is shown in the selected 1/10 octave band time series for the three receivers. The 1/10 octave band data for the 170 m receiver are shown in Fig. 4(a), and the 370 m and 766 m data are shown in Figs. 4(b) and 4(c). These time series data represent 46 sec averages taken at 3 min intervals. The high level impulsive appearance of the data from 140/1200Z to 140/1500Z (Julian day 140 = 20 May 1979) actually represents compressed envelopes of the impulsive noise illustrated in Fig. 3, which is from a source probably near the edge of the continental shelf. The two deeper hydrophones detect the impulsive noise at 250 Hz at a higher level than the 170 m receiver.

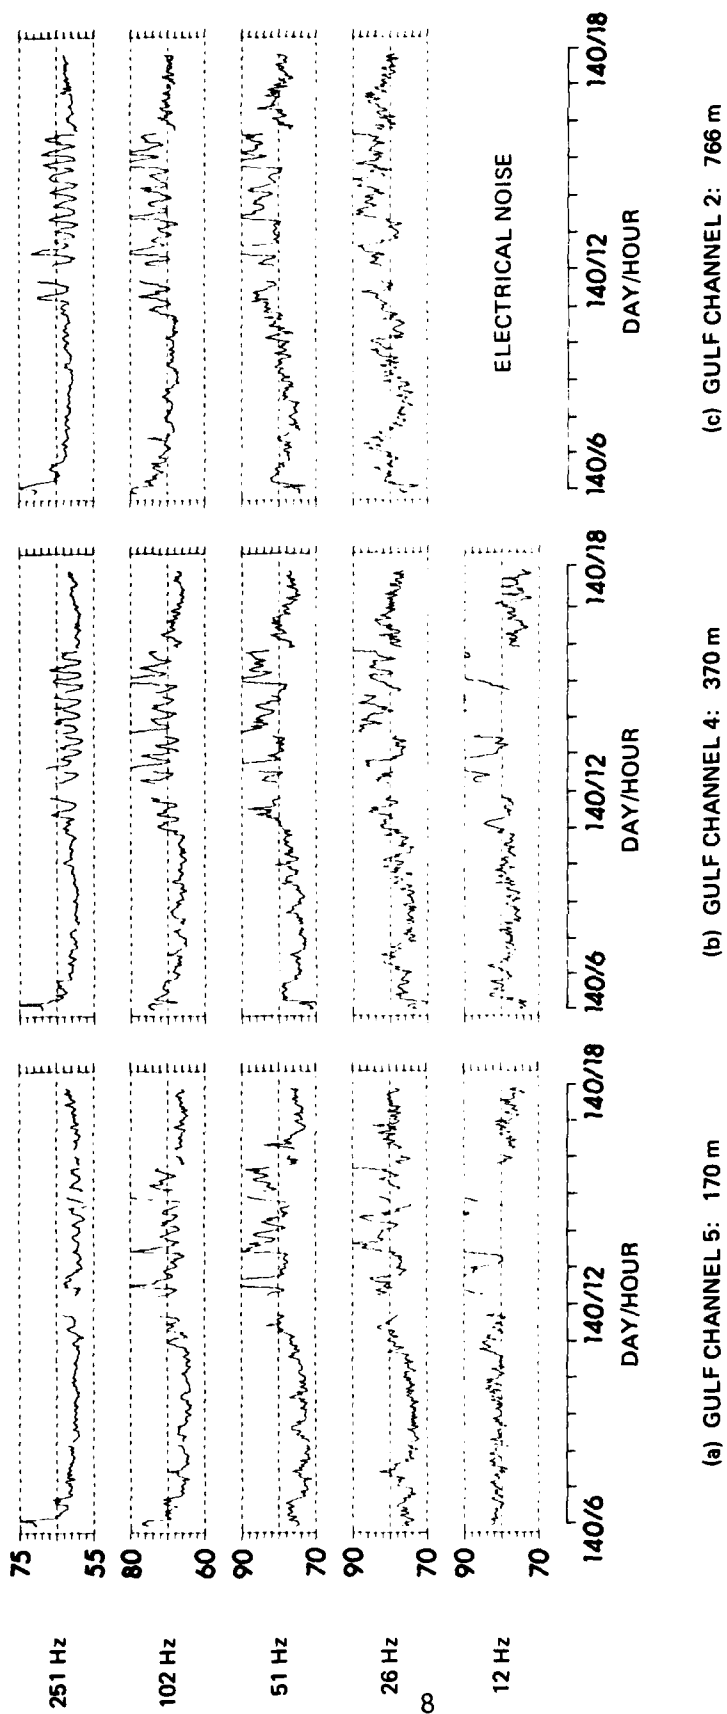



FIGURE 4
SELECTED 1/10 OCTAVE BAND TIME SERIES FOR THREE RECEIVERS

III. PERCENTILE SPECTRA

The 1/10 octave percentile spectra for the 12 h period are seen in Figs. 5(a)-5(c) for the three receiver depths. The peak levels for the three depths are essentially the same and the bubble pulse frequency for the dominant source is 16-18 Hz. The moored source 8 miles north of the PAR is the source of the peak at 175 Hz. The lower percentile levels at 50 Hz show a slight increase (2 dB) in the level at the SOFAR axis.

A better look at one of the time periods dominated by seismic exploration noise is shown in the 13 min period of Figs. 6(a)-6(c). There is a slight depth dependence for the frequencies between 150 and 250 Hz where the shallow 170 m receiver is detecting lower levels on the order of 5-10 dB. This dependence is also seen in the 1/10 octave time series of Figs. 4(a)-4(c).

A relatively quiet time is found at 140/0822-0837Z for all three receiver depths. The percentile spectra shown in Figs. 7(a)-7(c) again show a slight depth dependence from 25 to 100 Hz. The moored source is clearly detectable.

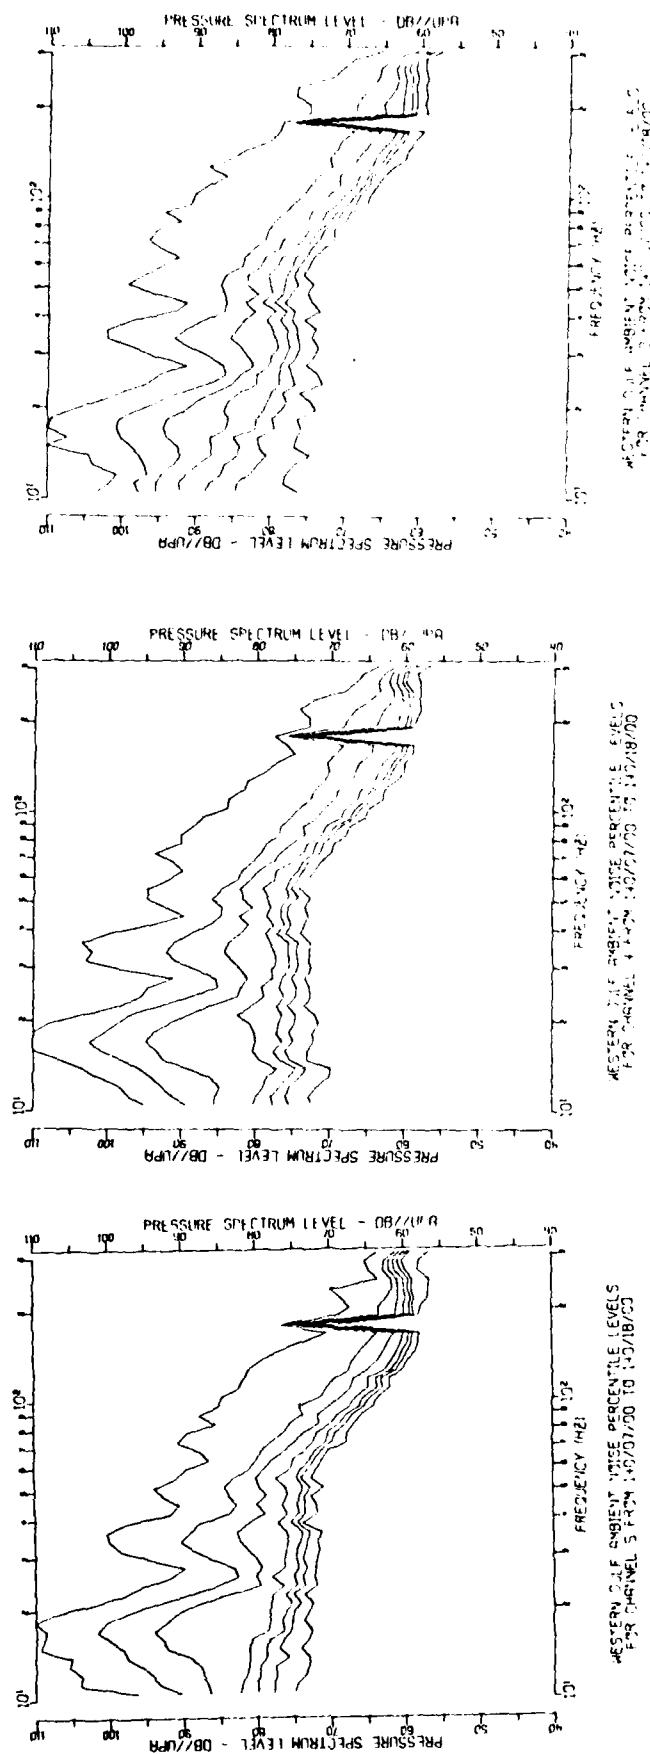

(a)

(b)

(c)


FIGURE 5

PERCENTILE SPECTRAL LEVELS FOR THE TOTAL 12 HOUR ANALYSIS PERIOD

BASED ON 1/10 OCTAVE BAND DATA


PERCENTILES LEVELS DISPLAYED

MINIMUM, 10%, 25%, 50%, 75%, 90%, MAXIMUM

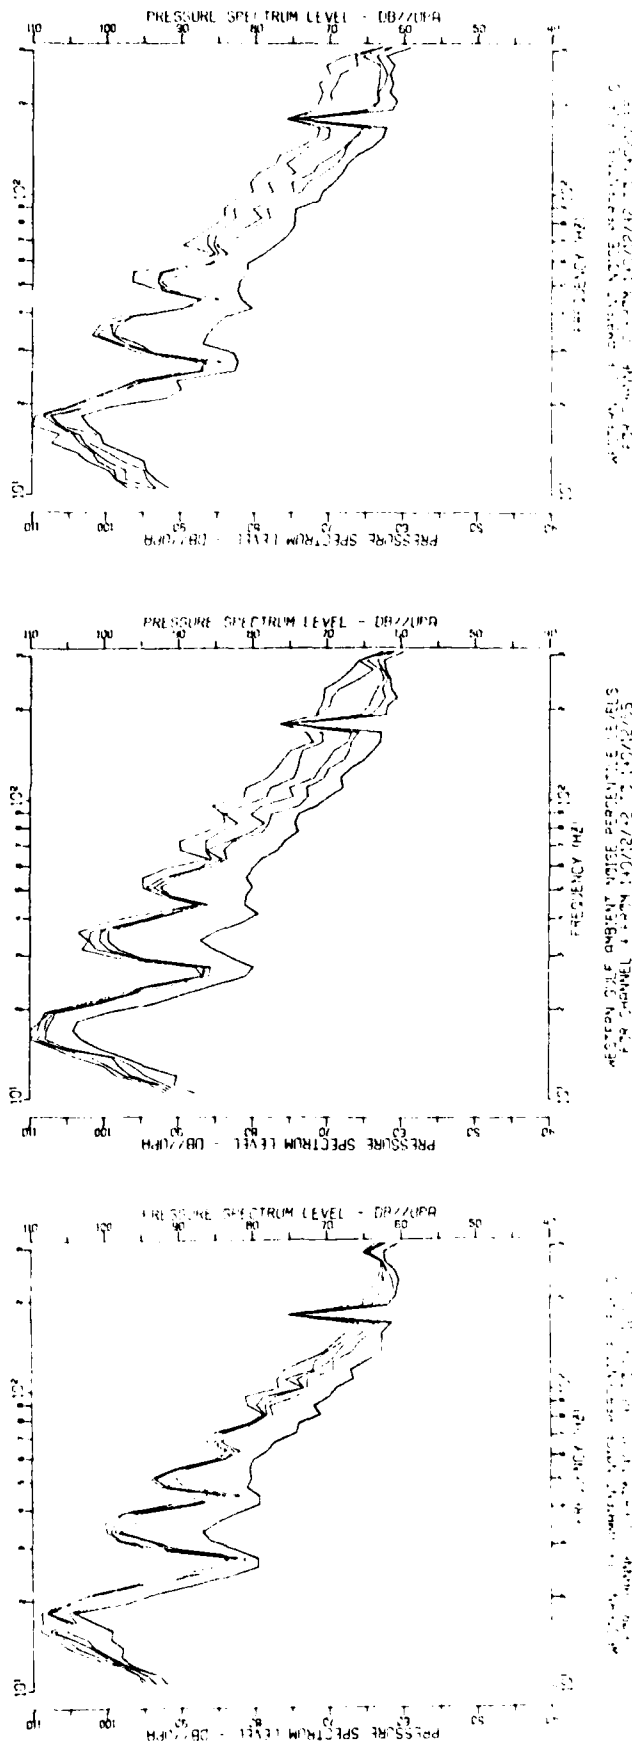

(a) GULF CHANNEL 5: 170 m
(b) GULF CHANNEL 4: 370 m
(c) GULF CHANNEL 2: 766 m


FIGURE 6
PERCENTILE SPECTRAL LEVELS DURING A PERIOD
OF INTENSE SEISMIC EXPLORATION
PERCENTILES LEVELS DISPLAYED
MINIMUM, 10%, 25%, 50%, 75%, 90%, MAXIMUM

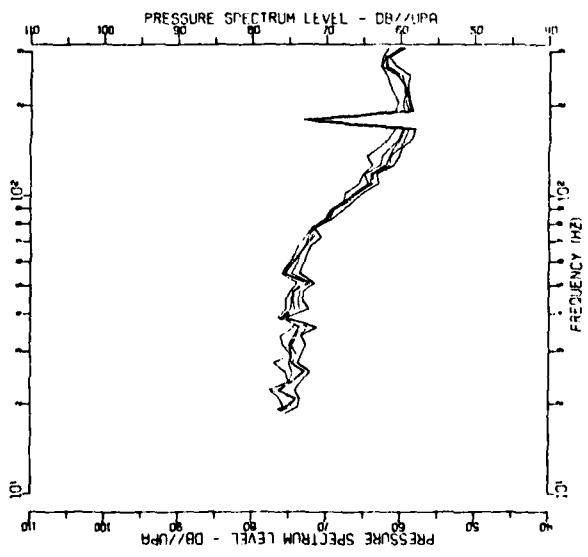

WESTERN GULF AMBIENT NOISE PERCENTILE LEVELS
FOR CHANNEL 5 FROM 140/08/22 TO 140/08/37

(a)


GULF CHANNEL 5: 170 m

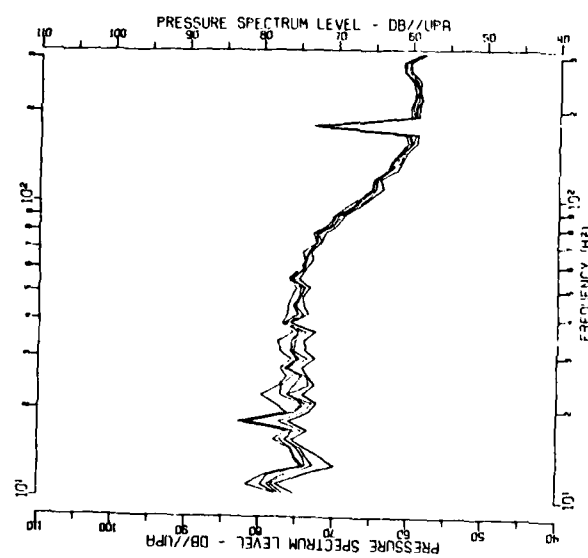

WESTERN GULF AMBIENT NOISE PERCENTILE LEVELS
FOR CHANNEL 4 FROM 140/08/22 TO 140/08/37

(b)

GULF CHANNEL 4: 370 m

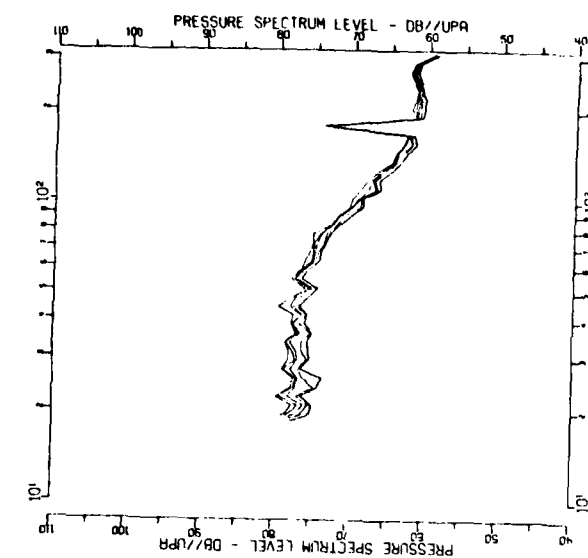

WESTERN GULF AMBIENT NOISE PERCENTILE LEVELS
FOR CHANNEL 2 FROM 140/08/22 TO 140/08/37

(c)

GULF CHANNEL 2: 766 m

FIGURE 7
PERCENTILE SPECTRAL LEVELS DURING A RELATIVELY QUIET TIME
PERCENTILES LEVELS DISPLAYED
MINIMUM, 10%, 25%, 50%, 75%, 90%, MAXIMUM

IV. MOORED SOURCE

The moored source was located at $25^{\circ}54.2'N$ and $94^{\circ}32.7'W$, approximately 8 miles north of the PAR. The source depth was about 850 m; the bottom depth was 3177 m. The source level was 170 dB//1 μPa at 1 m and radiated at 175.15 Hz. The received levels for the three receivers shown in Fig. 8 were approximately 87 dB//1 μPa with variations of 6 dB. The propagation loss is almost pure spherical spreading which is reasonable for such a short range [$20 \log(\text{range} = 15,558 \text{ m}) = 83.8 \text{ dB}$]. The measured propagation loss (PL) is 170 dB - 87 dB = 83 dB. The deep receiver at 766 m detects the highest level signal most of the time because it is on the acoustic axis with the source.

The first hour of the time series shows sharp level changes indicating the deployment of the PAR system. There are no strong diurnal variations over this 12 h period.

MOORED SOURCE AT 170, 370, AND 766 METERS

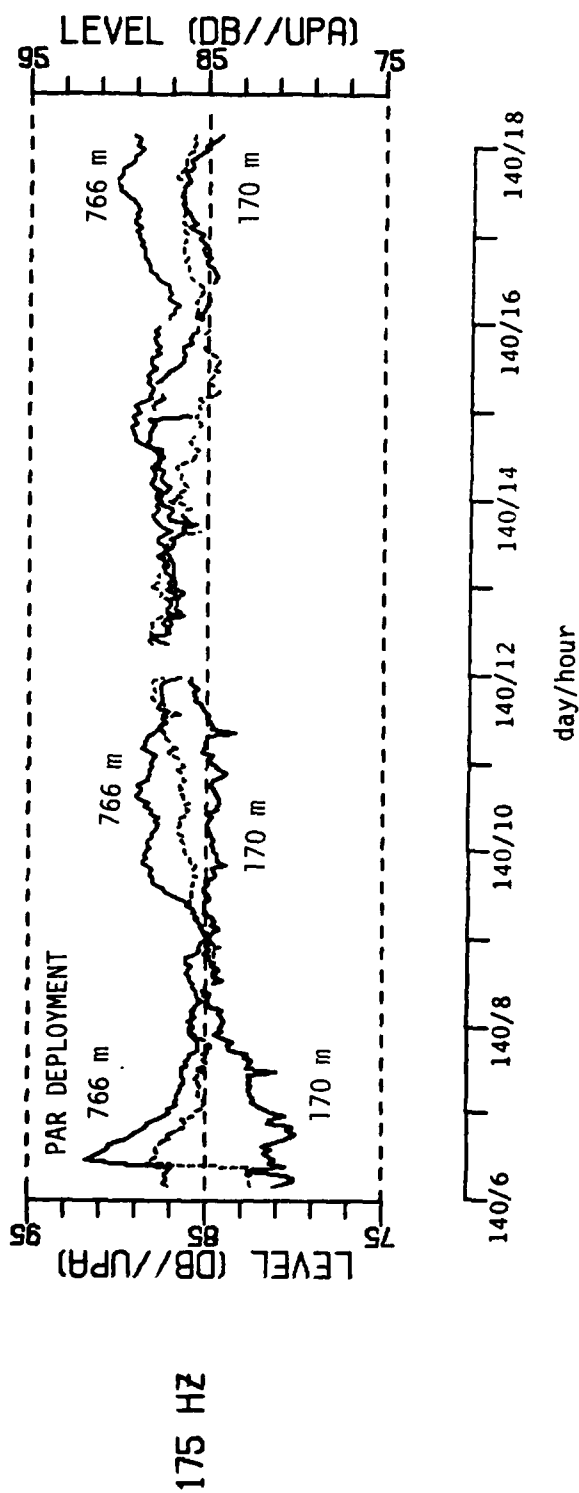


FIGURE 8
RECEIVED LEVELS FROM THE MOORED SOURCE
FOR THREE HYDROPHONE DEPTHS AS A FUNCTION OF TIME

V. ANALYSIS AND SUMMARY

A. Ambient Noise Relative to Number of Noise Sources

Ambient noise has been analyzed for a 12 h period for the Western Gulf of Mexico. The weather was calm and clear. A dominant feature in the acoustic field was the seismic exploration; one source with an 8.4 sec pulse rate was especially dominant. Percentile noise spectral levels show a large range of 73-110 dB//1 $\mu\text{Pa}/\sqrt{\text{Hz}}$ during the total 12 h period. The lower percentile spectral levels from minimum to 25% (from 25 to 70 Hz) represent times not so dominated by seismic exploration, and show noise levels near 73-80 dB//1 $\mu\text{Pa}/\sqrt{\text{Hz}}$. These levels are modest considering the large number of noise sources in the Gulf.

Within the 200 m depth contour along the Texas-Louisiana coast, there are 100-150 potential noise sources per 1° square. These include mobile rigs, production rigs, and service boats. As of 1978, there were over 780 production platforms, 1200 supply boats, and over 100 mobile rigs⁷ in the area. In addition to noise from the petroleum industry, a significant number of ships in the deep basin contribute to the noise field. An example of the shipping density, 1-5 ships per 1° square, has been obtained from the aircraft flight of 14 June 1979. The locations of a number of radar contacts and the flight radar coverage are shown in Fig. 9.

Ignoring the noise from seismic exploration, the Gulf noise levels are a few decibels less than the deep water noise near Bermuda. These levels may be compared with the 93-95 dB//1 $\mu\text{Pa}/\sqrt{\text{Hz}}$ values observed in the Oman Basin with six or more ships per 1° square.

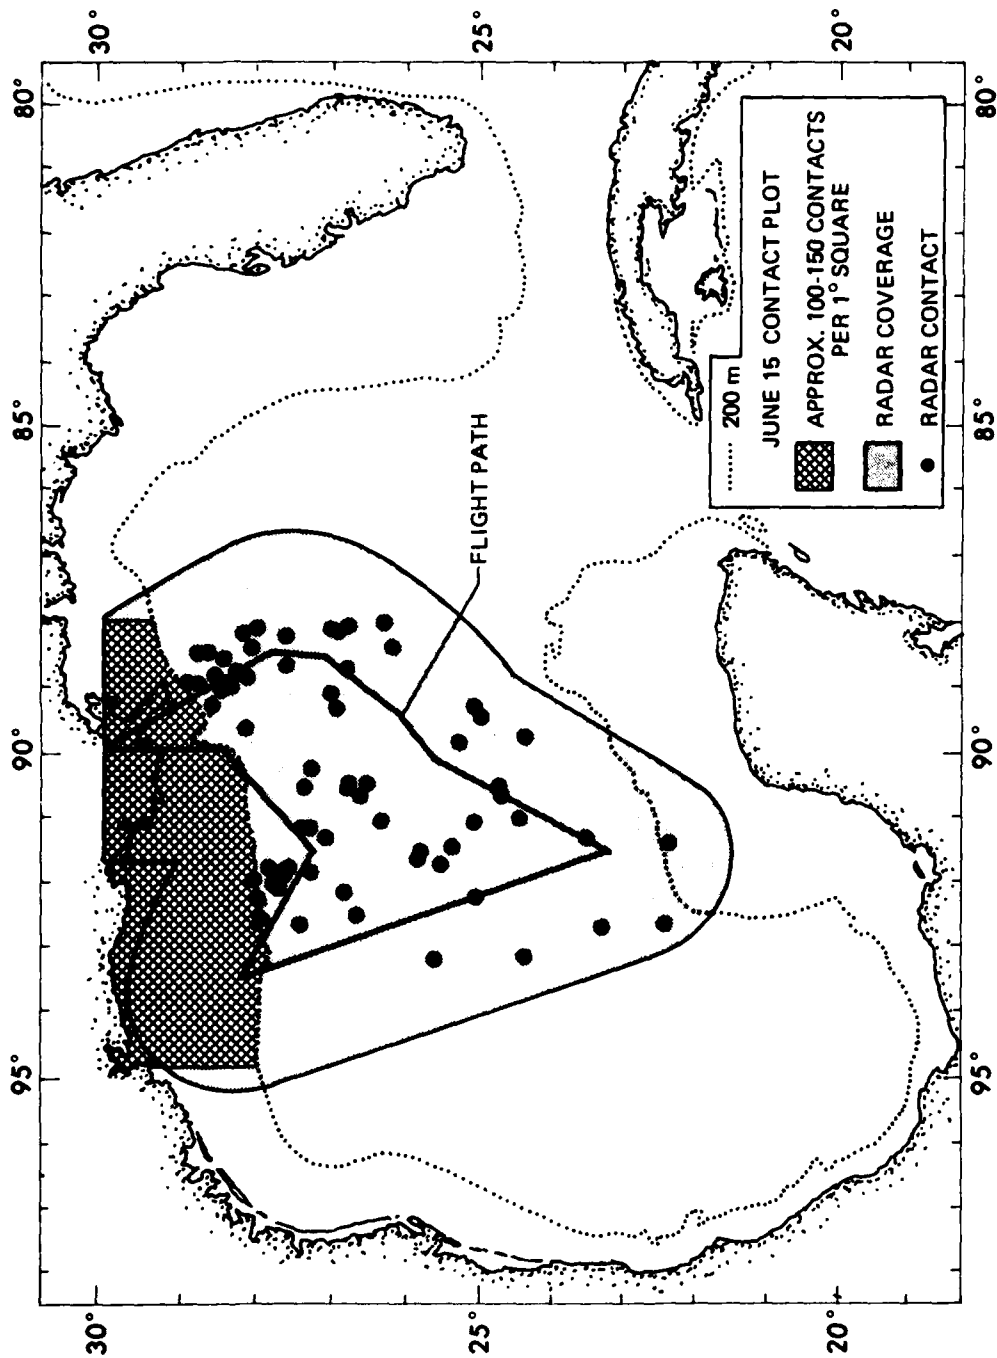


FIGURE 9
RADAR CONTACTS FOR THE WESTERN GULF

ARL:UT
AS-82-327
JAS - GA
3-30-82

B. Noise Depth Dependence

The noise depth dependence is of considerable interest. These data show only a slight (2 dB) depth dependence, which is just within the estimated ± 1 dB calibration accuracy of the system. From 25 to 70 Hz the data show a slight increase in level at the SOFAR axis relative to the shallow receiver at 170 m depth. References 7 and 8 discuss the mechanisms whereby sound from shallow water sources propagates to deep water and produces large noise field gradients between the SOFAR axis and the near-surface or near-bottom portions of the water column. One mechanism is that the limited number of low frequency normal modes that are available for excitation by sources in shallow water are confined, in deep water, to depths near the SOFAR axis. On the other hand, the higher order modes, which could couple to near-surface or near-bottom receivers in deep water, are more strongly attenuated than lower order modes as the noise propagates through the shallower water. The geoacoustic parameter estimates for sediment velocity and attenuation⁹ would support these arguments for a strong depth dependence of noise from shallow water sources. The fact that little depth dependence is seen suggests several possibilities. One is that the shallow water noise source levels are too low to be detected. Another possibility is that the ships in the deep basin, which would produce a more uniform noise field in the water column, are sufficiently numerous to mask the effect of shallow water sources.

APPENDIX

DATA PROCESSING PARAMETERS

These data were recorded on a 14-channel Geotech analog tape recorder. The recording speed was 15/120 ips and the data bandwidth was 300 Hz. Each data track recorded a deflutter/deskew tone at 892.86 Hz, including a large cycle every 256 cycles. The three data channels were digitized simultaneously (SSH) using channel 2 as the reference channel for deflutter/deskew. The data were reproduced at a 16:1 speedup (1-7/8 ips) and 45,000 samples were taken from each of the three channels every 3 min. The frequency bin spacing was 0.109 Hz ($= 892.86/8192$). Five 9.175 sec FFT's were power averaged for each 45.875 sec spectral estimate.

In the standard system, time in the form of day, hour, minute, second, and milliseconds is encoded into IRIG B code and recorded on channel 14.

Calibration was accomplished by recording a series of known sine wave frequencies and levels at the start of the tape and using post exercise calibration data from Naval Research Laboratory Underwater Sound Reference Detachment (NRL/USRD) for the hydrophone sensitivities.

A technical difficulty was the determination of the PAR gain during the data recording. The PAR was designed to record a dynamic range of more than 70 dB by automatically gain ranging in 6 dB steps every 1 min, and the gain state was normally encoded along with the time code. In this exercise the time code failed to record, knocking out the gain state information at the same time. This difficulty was overcome by detecting the moored source during the internal calibration sequence, which occurred 6 min every 6 h while the automatic gain control (AGC) was set to 0 dB gain. The detected moored source level could be tracked minute to minute from each periodic internal calibration sequence thereby establishing the PAR gain state minute to minute without ambiguity. The estimated calibration accuracy is ± 1 dB across the data band.

REFERENCES

1. Texas Instruments, Inc., Dallas, Texas, "Programmable Acoustic Recorder," TI Manual HP003-EG77.
2. Planning Systems, Inc., McLean, Virginia, "Aircraft Support for the CHURCH STROKE III, Cruise 0 Exercise," PSI Technical Report TR 120116, 28 November 1979.
3. Planning Systems, Inc., McLean, Virginia, "Locations of Petroleum Related Activity in the Gulf of Mexico," PSI Technical Report, August 1979.
4. A. J. Perrone, "Ambient Noise Spectrum Levels as a Function of Water Depth," J. Acoust. Soc. Am. 48, 362-370 (1979).
5. G. B. Morris, "Depth Dependence of Ambient Noise in the Northeastern Pacific Ocean," J. Acoust. Soc. Am. 64, 581-590 (1978).
6. K. C. Focke et al., "CHURCH STROKE II - Cruise 5 PAR/ACODAC Environmental Acoustic Measurements and Analysis" (U), Applied Research Laboratories Technical Report No. 79-52 (ARL-TR-79-52), Applied Research Laboratories, The University of Texas at Austin, 29 October 1979. CONFIDENTIAL
7. "Gulf of Mexico and Carribbean Sea Data and Model Base Report, Long Range Acoustic Propagation Project," LRAPP Report C79-027, July 1979. CONFIDENTIAL
8. S. R. Rutherford et al., "A Summary of the Results of a Study of Acoustic Bottom Interaction in a Range Dependent Environment," Applied Research Laboratories Technical Report No. 80-56 (ARL-TR-80-56), Applied Research Laboratories, The University of Texas at Austin, 14 November 1980.
9. M. W. Hooper et al., "Measurements and Analysis of Acoustic Bottom Interaction in the Northwestern Mexican Basin," Applied Research Laboratories Technical Report No. 81-37 (ARL-TR-81-37), Applied Research Laboratories, The University of Texas at Austin, 5 October 1981.

11 March 1982

DISTRIBUTION LIST FOR
ARL-TR-82-15
UNDER CONTRACT N00014-82-C-0049

Copy No.

	Commanding Officer
	Naval Ocean Research and Development Activity
	NSTL Station, MS 39529
1	Attn: Code 110
2	Code 115
3	Code 125L
4	Code 300
5	Code 320
6	Code 340
7	Code 500
8	Code 520 File
9	Code 530
	Commanding Officer
	Naval Research Laboratory
	Washington, DC 20375
10	Attn: Code 8100
11	Code 8160
12	Code 2627
	Commander
	Naval Oceanographic Office
	NSTL Station, Bay St Louis, MS 39529
13	Attn: Code 7300
14	Code 9210
	Naval Ocean Research and Development Activity
	Liaison Office
	Department of the Navy
	Arlington, VA 22217
15	Attn: Code 130
	Officer in Charge
	New London Laboratory
	Naval Underwater Systems Center
	New London, CT 06320
16	Attn: L. King
	Commander
	Naval Ocean Systems Center
	San Diego, CA 92152
17	Attn: M. Akers

Distribution List for ARL-TR-82-15 under Contract N00014-82-C-0049 (Cont'd)

Copy No.

18	Commanding Officer Naval Coastal Systems Center Panama City, FL 32407
19	Officer in Charge Naval Surface Weapons Center White Oak Laboratory Silver Spring, MD 20910
20	Officer in Charge David W. Taylor Naval Ship Research and Development Center Carderock Laboratory Bethesda, MD 20084
21	Director Naval Ocean Surveillance Information Center 4301 Suitland Road Washington, DC 20390
22	Commanding Officer Naval Intelligence Support Center 4301 Suitland Road Washington, DC 20390
23	Superintendent Naval Postgraduate School Monterey, CA 93940 Attn: Library
24	Assistant Secretary of the Navy RE&S Department of the Navy Washington, DC 20350 Attn: G. A. Cann
25	Chief of Naval Operations Department of the Navy Washington, DC 20350 Attn: OP-02
26	OP-03
27	OP-05
28	OP-095
29	OP-096
30	OP-951
31	OP-952
32	OP-951F
33	OP-952D

Distribution List for ARL-TR-82-15 under Contract N00014-82-C-0049 (Cont'd)

Copy No.

34 - 35	Headquarters Naval Material Command Washington, DC 20360 Attn: CAPT E. Young/ONT
36 - 37	Project Manager Antisubmarine Warfare System Project Department of the Navy Washington, DC 20360 Attn: PM-4
38	Director Strategic System Projects Office Department of the Navy Washington, DC 20376 Attn: PM-1
39	Chief of Naval Research
40	Department of the Navy
41	Arlington, VA 22217
42	Attn: Code 100
43	Code 102B
44	Code 220
	Code 230
	Code 460
	Code 480
45	Commanding Officer Office of Naval Research Branch Office London FPO New York, NY 09510 Attn: Code 241
46	Commander
47	Naval Electronic Systems Command
48	Washington, DC 20360
49	Attn: PME-124
50	PME-124TA
51	PME-124/30
	PME-124/40
	PME-124/60
	Code 612
52	Commander
	Naval Sea Systems Command
	Washington, DC 20362
	Attn: R. Farwell
	Code 63RA

Distribution List for ARL-TR-82-15 under Contract N00014-82-C-0049 (Cont'd)

Copy No.

	Commander Naval Air Systems Command Washington, DC 20361
53	Attn: Code 370
54	PMA-264
55	Deputy Undersecretary of Defense for Research and Engineering Department of Defense Washington, DC 20301
	Defense Advanced Research Projects Agency 1400 Wilson Boulevard Arlington, VA 22209
56	Attn: T. Kooij
57	CDR K. Evans
58	Commander Naval Oceanography Command NSTL Station, MS 39529
59	Director of Navy Laboratories Room 1062, Crystal Plaza, Bldg. 5 Department of the Navy Washington, DC 20360
	Defense Advanced Research Projects Agency ARPA Research Center Unit 1, Bldg. 301A NAS Moffett Field, CA 94035
60	Attn: E. L. Smith
61 - 62	Commanding Officer and Director Defense Technical Information Center Cameron Station, Building 5 5010 Duke Street Alexandria, VA 22314
	Director of Naval Matters Center for Naval Analyses Alexandria, VA 22311
63	Attn: C. E. Woods
	Applied Physics Laboratory The Johns Hopkins University Johns Hopkins Road Laurel, MD 20810
64	Attn: A. Chwastyk
65	W. L. May
66	G. L. Smith

Distribution List for ARL-TR-82-15 under Contract N00014-82-C-0049 (Cont'd)

Copy No.

67	Arthur D. Little, Inc.
68	15 Acorn Rd.
	Cambridge, MA 02140
	Attn: Dr. G. Raisbeck
	W. G. Sykes
69	Woods Hole Oceanographic Institution
	Woods Hole, MA 02543
	Attn: E. E. Hayes
70	B-K Dynamics, Incorporated
	15825 Shady Grove Road
	Rockville, MD 20850
	Attn: P. G. Bernard
71	Bell Telephone Laboratories, Inc.
72	Whippany Road
	Whippany, NJ 07961
	Attn: J. Goldman
	L. F. Fretwell
73	Daubin Systems Corporation
	104 Crandon Blvd.
	Key Biscayne, FL 33149
	Attn: S. C. Daubin
74	Ocean Data Systems, Inc.
	6000 Executive Boulevard
	Rockville, MD 20852
	Attn: G. V. Jacobs
75	Planning Systems, Inc.
	7900 Westpark Drive
	Suite 600
	McLean, VA 22101
	Attn: R. S. Cavanaugh
76	Science Applications, Inc.
77	P.O. Box 1303
	McLean, VA 22101
	Attn: J. S. Hanna
	C. W. Spofford
78	Tracor, Inc.
79	Rockville Laboratory
	1601 Research Blvd.
	Rockville, MD 20850
	Attn: J. T. Gottwald
	W. Williams

Distribution List for ARL-TR-82-15 under Contract N00014-82-C-0049 (Cont'd)

Copy No.

80	TRW Incorporated
81	7600 Colshire Drive
	McLean, VA 22101
	Attn: R. T. Brown
	I. B. Gereben
82	Undersea Research Corporation
	7777 Leesburg Pike, Suite 306
	Falls Church, VA 22043
	Attn: V. F. Anderson
82	Underwater Systems, Inc.
	8121 Georgia Avenue
	Silver Spring, MD 20910
	Attn: M. S. Weinstein
83	Western Electric Company, Inc.
84	P.O. Box 20046
	Greensboro, NC 27420
	Attn: R. H. Harris
	T. Clark
85	Office of Naval Research
	Resident Representative
	Room 582, Federal Building
	Austin, TX 78712
86	Environmental Sciences Division, ARL:UT
87	Stephen K. Mitchell, ARL:UT
88	Reuben H. Wallace, ARL:UT
89 - 90	Library, ARL:UT

ATE
LME